

## **PORTABLE GENERATORS**

## 5500 Watts Electric Start


49-STATE/CSA CERTIFIED

5500 Running Watts 6875 Starting Watts Model 6037



## **FEATURES**


- OHV engine is designed for long life with cast iron sleeves and low oil shut down.
- User-friendly design has conveniently placed controls and simple illustrated operating instructions for easy start-up.
- Large steel fuel tank requires less frequent refills so run times are extended.
- Heavy-duty wheels roll easily over rough or uneven terrain.
- High-leverage handles allow easy mobility, fold down for compact storage.
- Push-button electric start with included battery.

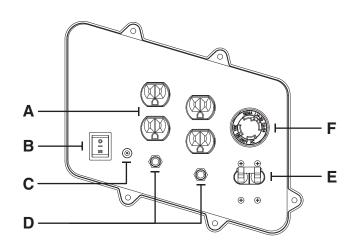


CUSTOMER CONNECTION PANEL			
Α	Receptacle: (4) 5-20R 120V		
В	Engine Start/Stop Switch		
С	Battery Charger Input		
D	Circuit breakers (2) 20 Amp		
Е	Circuit breakers: (2) 25 Amp		
F	Receptacle: (1) L14-30R Twist-Lock 120/240V		

SPECIFICATIONS		
Model Number	6037-0	
Running Watts	5500	
Starting Watts	6875	
Rated Amps @ 120 Volts	45.8	
Rated Amps @ 240 Volts	22.9	
Engine Type	OHV	
Engine Displacement	389cc	
Low Oil Shutdown	Yes	
Starting Method	Electric/Pull	
Battery	Included	
Outlets	(4) 5-20R 120V (1) L14-30R Twist-Lock 120/240V	
Fuel Tank Capacity	5.8 Gallons	
Run Time at 50% Load	9.1 Hours	
Handles	2 Folding/Locking	
Wheels	10" Solid	
Included in box	Engine oil, funnel, quick set-up guide	
Warranty - Residential	3 Year Ltd.	
Warranty - Commercial	1 Year Ltd.	
Configuration/Emissions	49-State/CSA	

DIMENSIONS (In inches)			
Length (handles folded down)	29.80		
Extended Length (Handles up)	45.00		
Width (including wheels)	28.75		
Height (including wheels)	26.75		
Product weight	196 lbs.		
Carton Length	31.10		
Carton Width	22.05		
Carton Height	22.44		
Shipping weight	209 lbs.		





## Generac Power Systems, Inc.

S45 W29290 Hwy. 59 Waukesha, WI 53187 Tel: 1-855-GEN-INFO honeywellgenerators.com 0192260HWL-A March 2011 © Generac Power Systems, Inc. All rights reserved. Specifications subject to change without notice.

The Honeywell Trademark is used under license from Honeywell International Inc.

Honeywell International Inc. makes no representation or warranties with respect to this product.

